


PARTS LIST FOR SANSUI SPEAKER SYSTEM

Ref No. USP-45

PM-C70

Sansui

1. FRONT VIEW

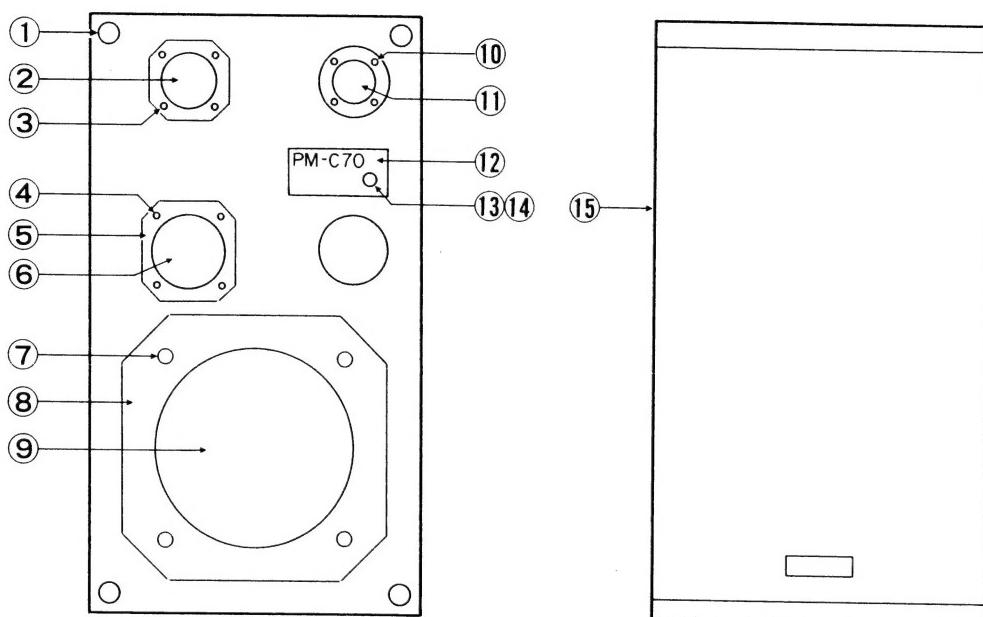

Parts List

Parts No.	Stock No.	Description
1	14304900	Latch
2	14288100	T-207, Tweeter
3	14305100	Hex Socket Wood Screw, M4 x 20
4	14305100	Hex Socket Wood Screw, M4 x 20
5	14304700	Dress Ring for S-171
6	14288000	S-171, Midrange
7	14310700	Hex Socket Wood Screw, M6 x 30

Parts No.	Stock No.	Description
8	14304800	Dress Ring for W-245
9	14287900	W-245, Woofer
10	14305100	Hex Socket Wood Screw, M4 x 20
11	14288200	T-208, Super Tweeter
12	14310200	Name Plate
13-1	14310300	Knob(big), high range switch
13-2	14310400	Knob(small), high range switch
14	14310500	High Range Switch
15	14304300	Front Grille Ass'y
	14304600	2P Input Terminal

2. SPECIFICATIONS

Speakers used

Woofers	250 mm (9-27/32") PMC Cone-type
Midrange	100 mm (3-15/16") PMC Cone-type
Tweeter	50 mm (1-15/16") Cone-type
Super tweeter	16 mm (5/8") Dome-type
Maximum input power	200 watts
Impedance	6 ohms
Sensitivity	91 dB/W (at 1 m)
Frequency range	35 to 35,000 Hz (in normal listening room)
Crossover network	4 way parallel type 12 dB/oct low cut for midrange 12 dB/oct low cut for tweeter 6 dB/oct low cut for super-tweeter

Crossover frequency..... 3.5 kHz, 10 kHz, 15 kHz

Finish Maple grain vinyl

Dimensions 330 mm (13") Width

590 mm (23-7/32") Height

307 mm (12-3/32") Depth

395 mm (15-9/16") Packed width

675 mm (26-9/16") Packed height



325 mm (12-25/32") Packed depth

Weight 12.8 kg (28.2 lbs) Net

15.0 kg (33.1 lbs) Packed

* Design and specifications subject to change without notice for improvements.

3. CROSSOVER NETWORK

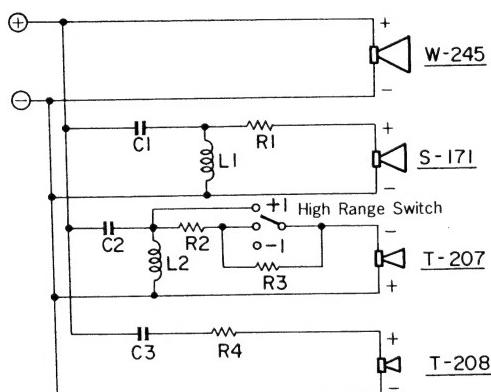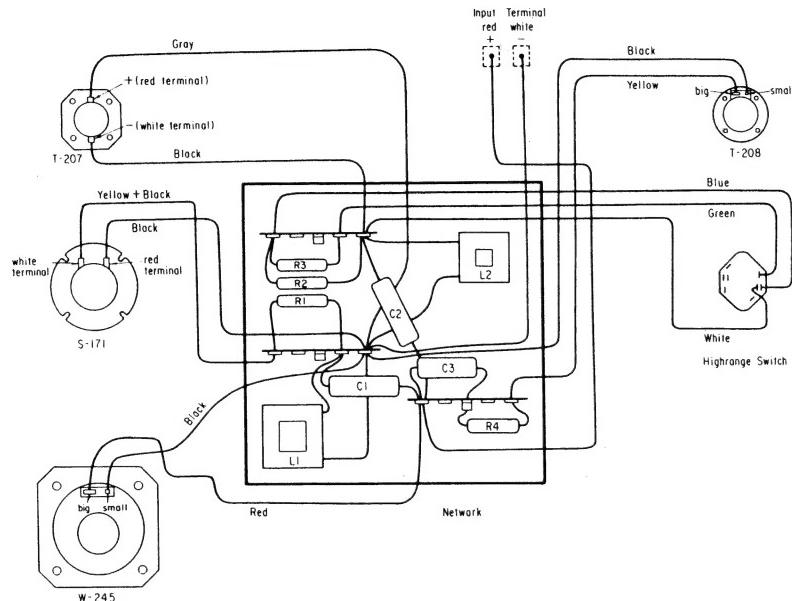


Parts List <Crossover Network>

Parts No.	Stock No.	Description
C1	14176600	6.8μF 50V E.B.
C2	14289300	2.2μF 50V E.B.
C3	14175400	1.0μF 50V E.B.
R1	14305700	3.3Ω 4W Ce.R.
R2	14305800	4.7Ω 4W Ce.R.
R3	14305900	33Ω 4W Ce.R.
R4	14305700	3.3Ω 4W Ce.R.
L1	14304400	Inductor, 0.62mH
L2	14304500	Inductor, 0.33mH

E.B.: Bi-Polar Electrolytic Capacitor
Ce.R.: Cement Resistor

4. PACKING PARTS LIST

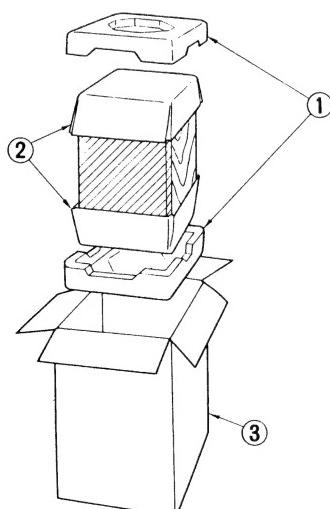

Parts List <Packing>

Parts No.	Stock No.	Description
1	14305400	Styrofoam Packing
2	14305500	Packing
3	14305300	Carton Case

5. ACCESSORY PARTS LIST

Stock No.	Description
46529600	Operating Instruction
14305600	Speaker Cord